




2.4G Rubber Antenna	
GL-DY465	
Electrical Index	
Frequency-MHz	2400-2500
Gain-dBi	3.0
VSWR	<2.0
Normal Impedance-Ω	50
Polarization	Linear
Mechanical Index	
Connector	RP – SMA male
Antenna Dimension-mm	Ø13* 1 7 8 . 6
Material	ABS
Environmentally Friendly	ROHS Compliant
Temperature-°C	-40~ +85
Humidity- %	5~95



D r a w i n g

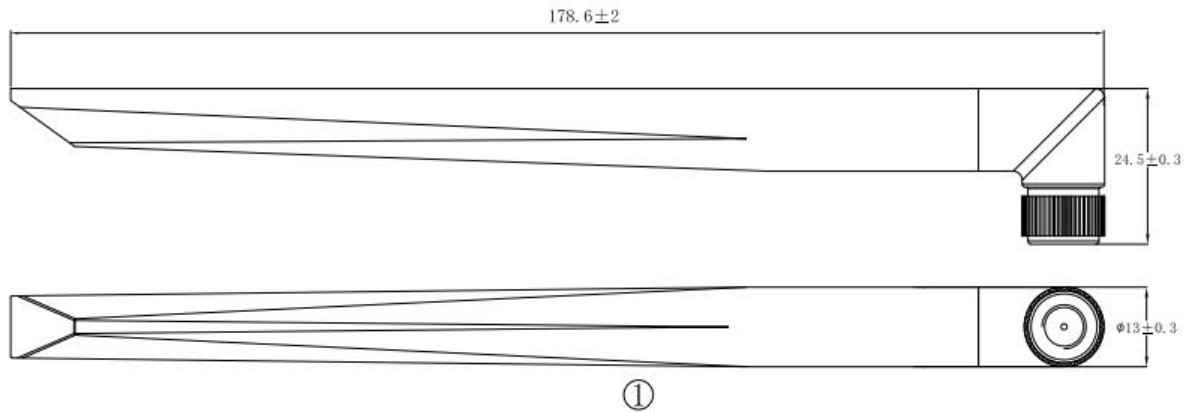

T e c h n i c a l R e q u i r m e n t s

- 1、Hit "*" as the key detection size, and the unmarked tolerance is according to SJ/T10628-1995 5 level accuracy; The unmarked size is subject to the actual product;
- 2、The product conforms to ROHS standard;
- 3、SMA needs to be gold plated, and the salt spray test 48H needs to be qualified. The material needs to undergo double 85 testing for 500 hours