



# GLOBAL EAST ASIA TECHNOLOGY CO.,LIMITED

**Product name:** MIMO Omni Antenna

**Product model:** GL-DY7060VV3

**Applications:**


Indoor distributed antenna system.

**Features:**

Light weight, small size, wide bandwidth;

Anti-ultraviolet ABS radome.

Dual polarization, broadband.

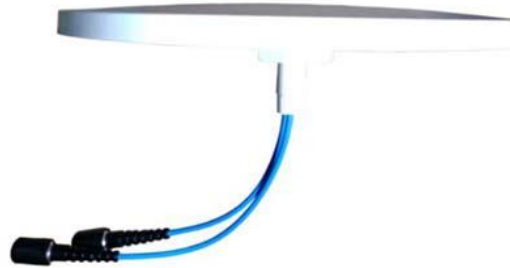

Electrical Specifications				
Frequency Range-MHz	698-960	1710-2700	3400-3800	4900-6000
VSWR	≤1.8	≤1.8	≤1.8	≤1.8
Gain-dBi	2.5 i	3	4	5
Horizontal beam width	360°	360°	360°	360°
Vertical beam width	65°	55°	50°	45°
Polarization	Horizontal			
Input Impedance-Ω	50			
Isolation between ports-dB	≥18	≥15	≥25	≥25
Intermodulation IM3 (2x33dBm)-dBc	≤-150			
Maximum input power-W	50			
Lightning protection	DC Ground			
Mechanical Specifications				
Input connector type	2×N-K			
Dimensions-mm	Φ266×18			
Antenna weight-KGS	0.5			
Radiating Element Material	PCB			
Radome material	ABS			
Radome color	White			
Operating temperature	-40°C to +65 °C			

Add: Room826, Floor 8,BLDG 13, University Science Park(East), Zhengzhou City, P.R.Henan, China.

Tel: 86-371-60911368 Email:info@global-antenna.com

Web:<http://www.asialeren.com> <http://www.global-antenna.com>