




PS3-0.5/6-NE

【Parameters/Specifications】

Frequency Range	500 ~ 6000 MHz/0.5 -6GHz
Insertion Loss	≤ 2.8 dB (Excluding theoretical loss 4.8 dB)
Combined port VSWR	Typ.1.26 / Max.1.5
Distribution port VSWR	Typ.1.18 / Max.1.4
Isolation	Typ.25dB / Min.18dB
Amplitude Balance	± 0.8dB
Phase Balance	±8°
Impedance	50 Ohms
Input/Output Connectors	N-Female
Power Rating	Splitter 20W (Power divider time) ;Combiner 1W(Combiner time)
Operation Temperature	-35°C ~ +75°C
Surface Finishing	Sandblasting natural color conductive oxide
Outline Dimensions	130*74*20 (mm)
Weight	510 (g)

【Draft specifications】

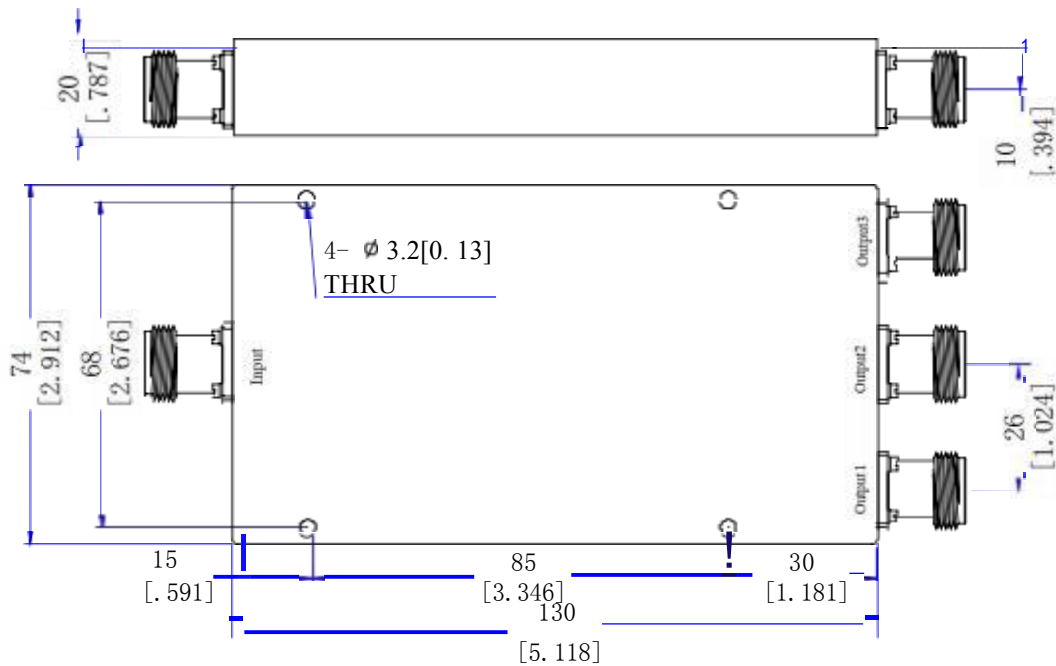

Note: Dimensions (mm / [inch]), General tolerance (±0.3)