




400MHz Steel Wire

433 Steel wire	
GLR400ZJ	
Electrical Index	
Frequency-MHz	433.175-434.665
VSWR	<2.0
Gain-dBi	≥6
Max Power	100W
Lightning protection	DC Ground
Normal Impedance-Ω	50
Polarization	Liner
Mechanical Index	
Weight	25g
Connector	M male
Antenna Dimension-mm	940
Material	Steel
Radome color	Black
Vibration	10 to 55Hz with 1.5mm amplitude 2hours
Environmentally Friendly	ROHS Compliant
Temperature-°C	-40~ +65
Humidity-%	5~95



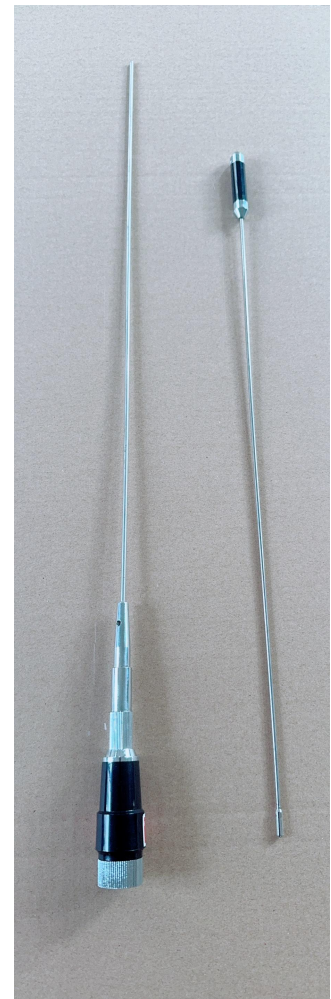

GLOBAL EAST ASIA TECHNOLOGY CO.,LIMITED

<https://www.global-antenna.com>



Magnet Base	
GLR400ZJ	
Electrical Index	
Frequency-MHz	433.175-434.665
VSWR	<2.0
Gain-dBi	≥6
Max Power	100W
Lightning protection	DC Ground
Normal Impedance-Ω	50
Polarization	Liner
Mechanical Index	
Weight	≤250g
Cable	RG58 3m
Connector	SL-16P + SMA male
Antenna Dimension-mm	Ø90*37
Material	Iron
Radome color	Black
Vibration	10 to 55Hz with 1.5mm amplitude 2hours
Environmentally Friendly	ROHS Compliant
Temperature-°C	-40~ +65
Humidity-%	5~95



Testing VSWR

