

GLOBAL EAST ASIA TECHNOLOGY CO.,LTD

Product name: Omni Ceiling Mount Antenna

Product model: GL-DY7060V3

Applications:

Indoor distributed antenna system。

Features:

Light weight, small size, wide bandwidth;


Anti-ultraviolet ABS radome.




Electrical Specifications					
Frequency Range-MHz	617-698	698-960	1710-2700	3400-3800	4900-7125
VSWR	≤1.8	≤1.8	≤1.8	≤1.8	≤1.8
Gain-dBi	1.8	2.0	3	4	4.5
Horizontal beam width	360°	360°	360°	360°	360°
Vertical beam width	70°	65°	55°	50°	45°
Polarization	Vertical				
Intermodulation IM3 (2x43dBm)- dBc	≤-153				
Input Impedance-Ω	50				
Maximum input power- W	50				
Lightning protection	DC Ground				
Mechanical Specifications					
Input connector type	N female				
Dimensions- mm	Ø225×150				
Antenna weight- kg	0.5				
Radiating Element Material	Aluminum				
Radome material	ABS				
Radome color	White				
Operating temperature	-40°C to +65 °C				

GLOBAL EAST ASIA TECHNOLOGY CO.,LTD

**Horizontal
pattern**

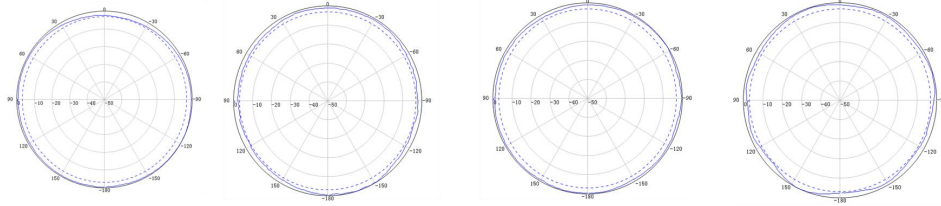

**Vertical
pattern**

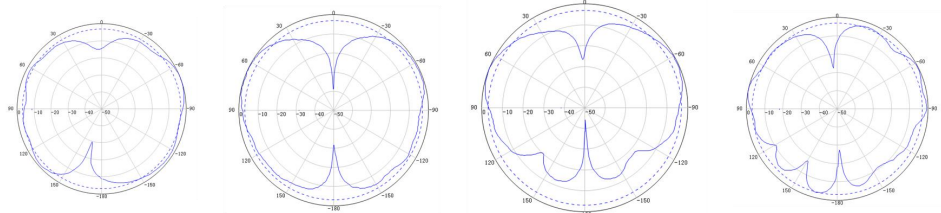

900MHz

1710MHz

2500MHz

3500MHz